


LED IP66 Basic




Type	Watt	Lumen*	A	B	C	kg	Code
LED IP66 Basic 600	23W	2931lm	605	85	88	1,2	IPB06
LED IP66 Basic 1200	25W	3267lm	1185	85	88	2	IPB12
LED IP66 Basic 1200	36W	5499lm	1185	85	88	2	IPB12
LED IP66 Basic 1500	29W	4230lm	1477	85	88	2,2	IPB15
LED IP66 Basic 1500	50W	6572lm	1477	85	88	2,2	IPB15

* Volgens opgave 10-2020. Gemeten bij 4000K, tolerantie van 10% van toepassing conform richtlijnen IEC.

Maatvoering A, B, C in mm

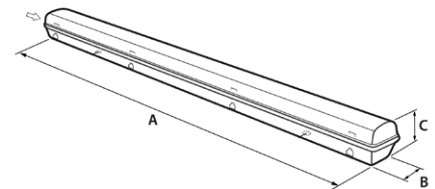

LED IP66 Basic met pendelclips

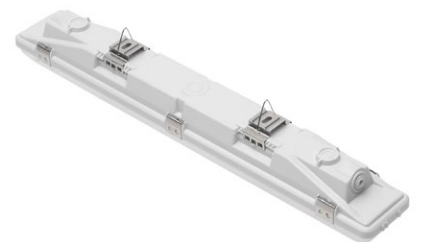

Optioneel



Montage



Lichtkleur



Specificaties	
Behuizing	PC (Polycarbonaat)
Beschermingsklasse (IP)	IP66
Slagvastheid (IK)	IK10
Energie label	A++
BREEAM / EIA	Ja
Garantie	5 jaar fabrieksgarantie*
Levensduur (uur)	50.000 (L80C10)**
Kleurweergave (CRI/RA)	>80
Kleurafwijking (SDCM)	Mac Adam <6
Flicker	<5%
Spanning (V)	220-240
Powerfactor (P)	>0,95
Driver	Tridonic

Omgevingstemperatuur
-20 tot 35°C



* Max Tc temp. 65°C gemeten bij Ta 25°C

** Conform Lighting Europe, "Evaluating the performance of LED based Luminaires"