



LED V

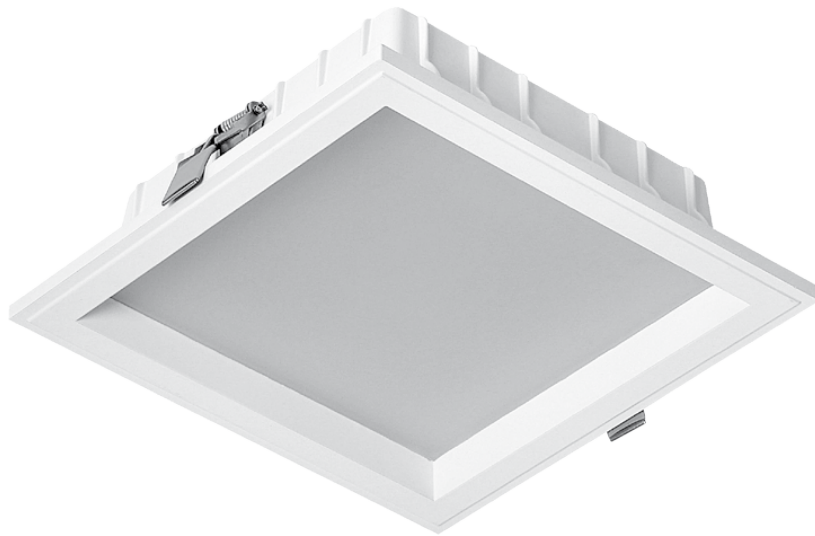

Type	Watt*	Lumen*	A	B	C	zaagmaat	kg
LED Downlighter V1	14W	872lm	140	140	62	125	0,6
LED Downlighter V2	14W	1155lm	180	180	70	165	0,9
LED Downlighter V2	20W	1435lm	180	180	70	165	0,9
LED Downlighter V3	20W	1848lm	220	220	70	205	1,2
LED Downlighter V3	27W	2140lm	220	220	70	205	1,2
LED Downlighter V3	37W	3020lm	220	220	70	205	1,2

* Volgens opgave 04-2018

Maatvoering A, B, C in mm

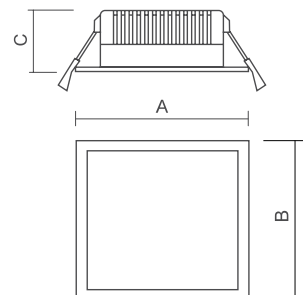

Optioneel



Montage



Specificaties

Behuizing	Al (Aluminium) / PC (Polycarbonaat)
Beschermingsklasse (IP)	IP44
Energieklasse	A+
BREAAAM / EIA	ja
Garantie	5 jaar fabrieksgarantie*
Kleurafwijking	Mac Adam (SDCM) < 3
Kleurweergave (CRI/RA)	>80
Levensduur (uur)	60.000 (L80C10)**
Lichtkleur	3000K/4000K/5000K/6500K
Powerfactor (P)	>0,95
Spanning (V)	220-240
Driver	Helvar

* Max Tc temp. 75°C gemeten bij Ta 25°C

** Toelichting LxCy factor, zie laatste pagina